

25.00 RXJ



www.ommelift.com

Crawler lift - Articulated

OMMELIFT



Omme Lift A/S

Lægårdsvej 4


7260 Sdr. Omme, Denmark

Phone: (+45) 75 34 13 00

Email: omme@ommelift.dk - Web: www.ommelift.com

Quality since 1906

25.00 RXJ Crawler lift

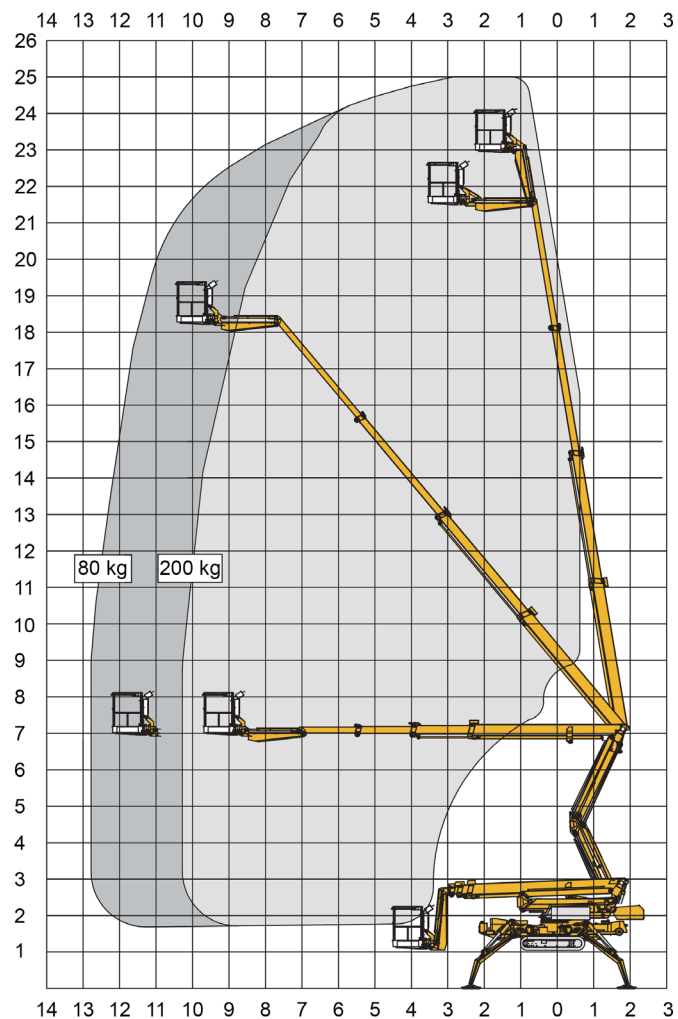

Technical Data:	25.00RXBJ	25.00RXDJ	25.00RXBDJ	
Max. working height	25.0 m			
Max. platform height	23.0 m			
Max. outreach	12.8 m			
Up and over clearance	7.0 m			
Angle boom length (boom + basket)	-			
Jib length (jib + basket)	2.7 m			
Vertical jib rotation	90°			
Turret rotation	± 355°			
Basket rotation	± 41°			
Max. basket load	200 kg			
Basket size (detachable)	1.25 x 0.8 x 1.1 m			
Stabilizer pad size	0.23 x 0.44 m			
	⁶ Diesel	BATTERY	DIESEL	⁶ HYBRID
Engine			14kW/18.8hp	14kW/18.8hp
Fuel tank capacity			25 l	25 l
Generator			24 V / 22 A	24 V / 22 A
Battery pack		24V/400Ah/5h		24V/200Ah/5h
Charger		24 V / 30 A		24 V / 30 A
Double charger system		Standard		Optional
Elec. descent from basket			Optional	
See www.ommelift.com for more features and options				
Gradeability, max. across slope	¹ Wide 30% (16.7°)			
Gradeability, max. up and down slope	30% (16.7°)			
Set-up ability on uneven ground	40% (21.8°)			
Crawler track length	1.76 m			
¹ Undercarriage in Wide ² Undercarriage in Narrow ³ Wide set-up ⁴ Wide/Narrow set-up				
Total weight	4280 kg	4065 kg	4200 kg	
¹ Live load in transit position	449 kg/m ²	426 kg/m ²	440 kg/m ²	
² Live load in transit position	496 kg/m ²	471 kg/m ²	486 kg/m ²	
³ Live load in working position	199 kg/m ²	190 kg/m ²	196 kg/m ²	
⁴ Live load in working position	252 kg/m ²	240 kg/m ²	248 kg/m ²	
Ground pressure, tracks (Hard surface)	0.61 kg/cm ² (2.20 kg/cm ²)	0.58 kg/cm ² (2.10 kg/cm ²)	0.60 kg/cm ² (2.10 kg/cm ²)	
Ground pressure, outrigger pad	1.89 kg/cm ²	1.89 kg/cm ²	1.89 kg/cm ²	
Max. force, outrigger	19.1 kN	19.1 kN	19.1 kN	

