

3000 R



www.ommelift.com

Crawler lift - Telescopic

OMMELIFT



Omme Lift A/S

Lægårdsvej 4


7260 Sdr. Omme, Denmark

Phone: (+45) 75 34 13 00

Email: omme@ommelift.dk - Web: www.ommelift.com

Quality since 1906

3000 R Crawler lift

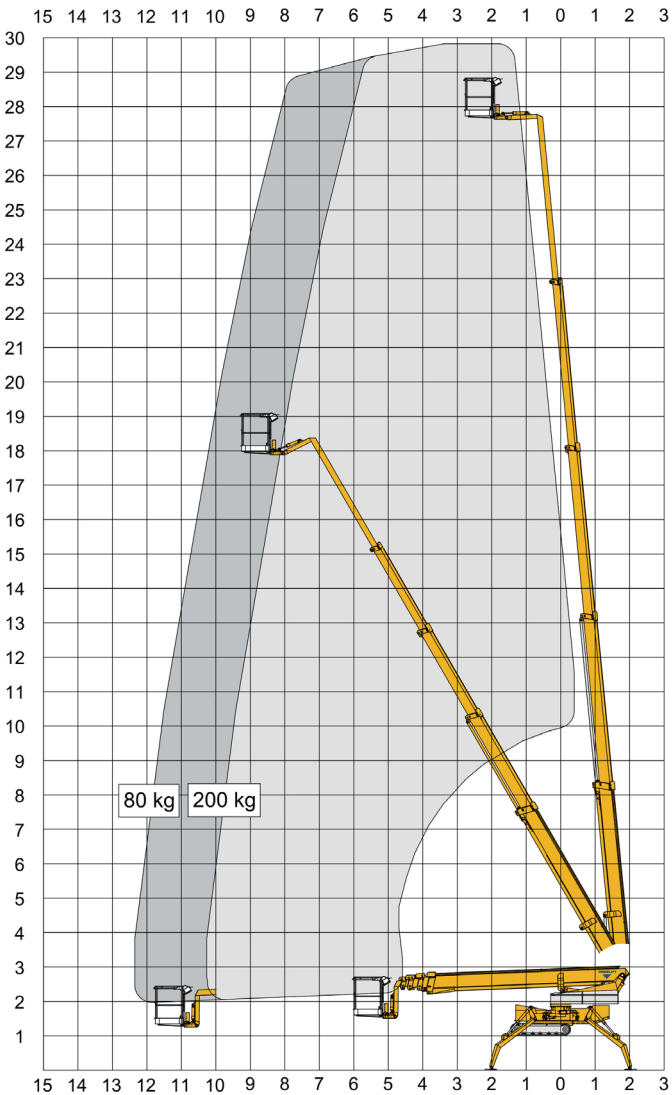

Technical Data:	3000 RB	3000 RD	3000 RBD	
Max. working height		29.7 m		
Max. platform height		27.7 m		
Max. outreach		12.6 m		
Up and over clearance		-		
Angle boom length (boom + basket)		2.0 m		
Jib length (jib + basket)		-		
Vertical jib rotation		-		
Turret rotation		± 355°		
Basket rotation		± 41°		
Max. basket load		200 kg		
Basket size (detachable)		1.25 x 0.8 x 1.1 m		
Stabilizer pad size		0.28 x 0.44 m		
	¹ Diesel	BATTERY	DIESEL	⁴ HYBRID
Engine			14kW/18.8hp	14kW/18.8hp
Fuel tank capacity			23 l	23 l
Generator			24 V / 22 A	24 V / 22 A
Battery pack		24V/400Ah/5h		24V/200Ah/5h
Charger		24 V / 30 A		24 V / 30 A
Double charger system		Standard		Optional
Elec. descent from basket			Optional	
See www.ommelift.com for more features and options				
Gradeability, max. across slope		25% (14.0°)		
Gradeability, max. up and down slope		35% (19.3°)		
Set-up ability on uneven ground		40% (21.8°)		
Crawler track length		1.76 m		
¹ Undercarriage in Wide ² Undercarriage in Narrow ³ Wide set-up ⁴ Wide/Narrow set-up				
Total weight		3900 kg	3900 kg	3900 kg
¹ Live load in transit position		385 kg/m ²	385 kg/m ²	385 kg/m ²
² Live load in transit position		385 kg/m ²	385 kg/m ²	385 kg/m ²
³ Live load in working position		195 kg/m ²	195 kg/m ²	195 kg/m ²
⁴ Live load in working position		240 kg/m ²	240 kg/m ²	240 kg/m ²
Ground pressure, tracks (Hard surface)		0.55 kg/cm ² (2.00 kg/cm ²)	0.55 kg/cm ² (2.00 kg/cm ²)	0.55 kg/cm ² (2.00 kg/cm ²)
Ground pressure, outrigger pad		2.03 kg/cm ²	2.03 kg/cm ²	2.03 kg/cm ²
Max. force, outrigger		25.0 kN	25.0 kN	25.0 kN

