

3710 RJ



www.ommelift.com

Crawler lift - Telescopic


Omme Lift A/S
Lægårdsvej 4
7260 Sdr. Omme, Denmark
Phone: (+45) 75 34 13 00
Email: omme@ommelift.dk - Web: www.ommelift.com

OMMELIFT



Quality since 1906

3710 RJ Crawler lift

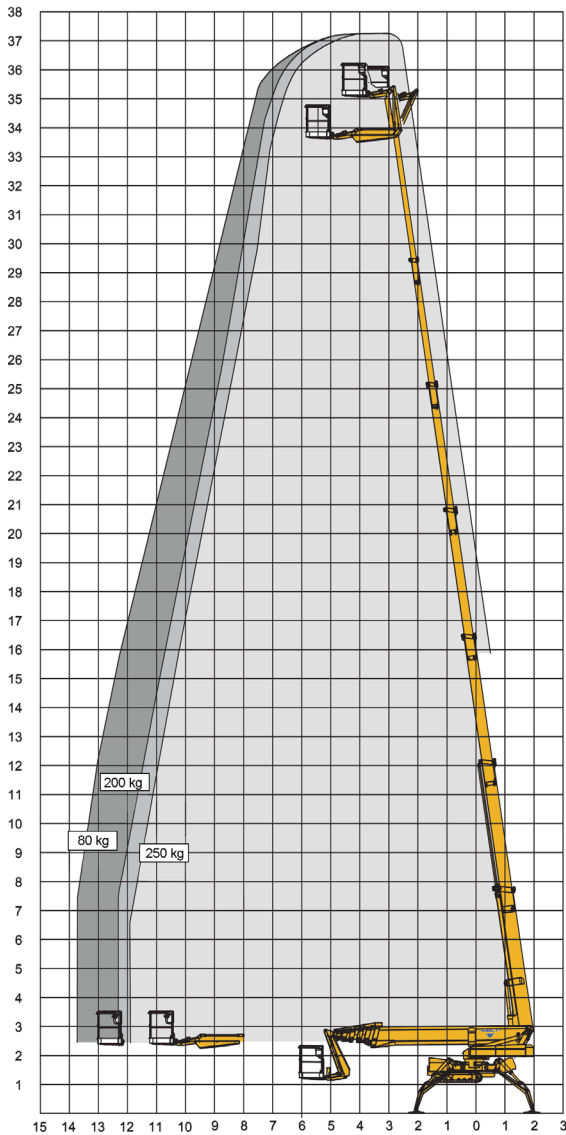

Technical Data:	3710 RBJ	3710 RDJ	3710 RBDJ	
Max. working height		37.0 m		
Max. platform height		35.0 m		
Max. outreach		13.7 m		
Up and over clearance		-		
Angle boom length (boom + basket)		-		
Jib length (jib + basket)		2.7 m		
Vertical jib rotation		130°		
Turret rotation		± 355°		
Basket rotation		± 41°		
Max. basket load		250 kg		
Basket size (detachable)		1.25 x 0.8 x 1.1 m		
Stabilizer pad size		0.28 x 0.44 m		
	⁶ Diesel	BATTERY	DIESEL	⁶ HYBRID
Engine			14kW/18.8hp	14kW/18.8hp
Fuel tank capacity			23 l	23 l
Generator			24 V / 22 A	24 V / 22 A
Battery pack		24V/400Ah/5h		24V/400Ah/5h
Charger		24 V / 30 A		24 V / 30 A
Double charger system		Standard		Optional
Elec. descent from basket			Optional	
See www.ommelift.com for more features and options				
Gradeability, max. across slope		¹ Wide 35% (19.3°)		
Gradeability, max. up and down slope		35% (19.3°)		
Set-up ability on uneven ground		30% (16.7°)		
Crawler track length		1.92 m		
¹ Undercarriage in Wide ² Undercarriage in Narrow ³ Wide set-up ⁴ Wide/Narrow set-up				
Total weight	5700 kg	5700 kg	5700 kg	
¹ Live load in transit position	467 kg/m ²	467 kg/m ²	467 kg/m ²	
² Live load in transit position	560 kg/m ²	560 kg/m ²	560 kg/m ²	
³ Live load in working position	260 kg/m ²	260 kg/m ²	260 kg/m ²	
⁴ Live load in working position	322 kg/m ²	322 kg/m ²	322 kg/m ²	
Ground pressure, tracks (Hard surface)	0.87 kg/cm ² (2.70 kg/cm ²)	0.87 kg/cm ² (2.70 kg/cm ²)	0.87 kg/cm ² (2.70 kg/cm ²)	
Ground pressure, outrigger pad	2.76 kg/cm ²	2.76 kg/cm ²	2.76 kg/cm ²	
Max. force, outrigger	34.0 kN	34.0 kN	34.0 kN	

